






We Make it EASY

# Installing **NTLWO 24" Slides** on existing OEM mounting angles

Note: All mounting angles provided below are standard OEM specified length mounting angles designed for 24" slide travel fifth wheels. Hole center spacing is based on OEM standards, front to rear hole alignment may vary. The NTLWO model represented below is for a 24" slide travel fifth wheel (43" overall rail length). The diagrams below place the (yellow) NTLWO in the recommended installation position on the mounting angle to illustrate the rearmost installation location. The green numbers represent the bolt locations for each OEM mounting angle. On some OEM models additional drilling is required for proper mounting (see red).

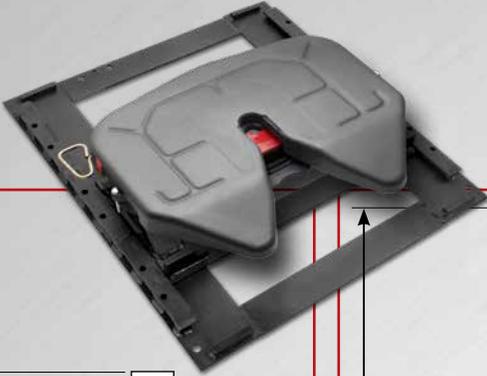

Driver Side Handle Part Number	Passenger Side Handle Part Number	Fifth Wheel Height	Slide Length	Weight
SLNTLW0675024	SRNTLW0675024	6-3/4"	24"	404 lbs
SLNTLW0775024	SRNTLW0775024	7-3/4"	24"	409 lbs
SLNTLW0875024	SRNTLW0875024	8-3/4"	24"	415 lbs

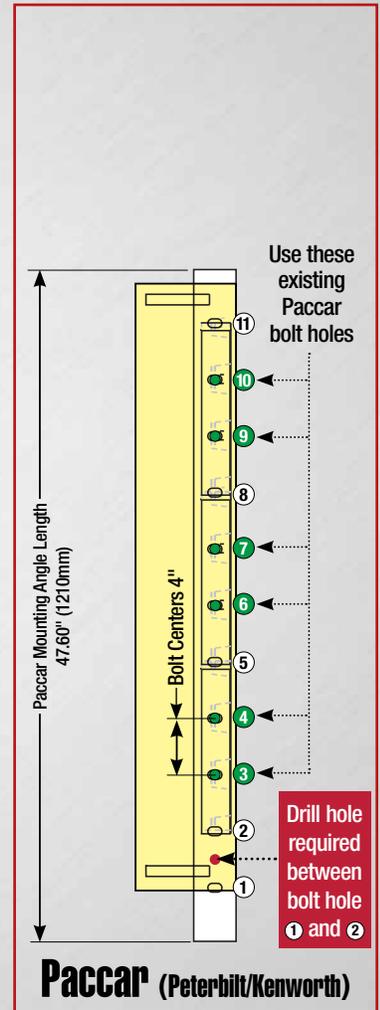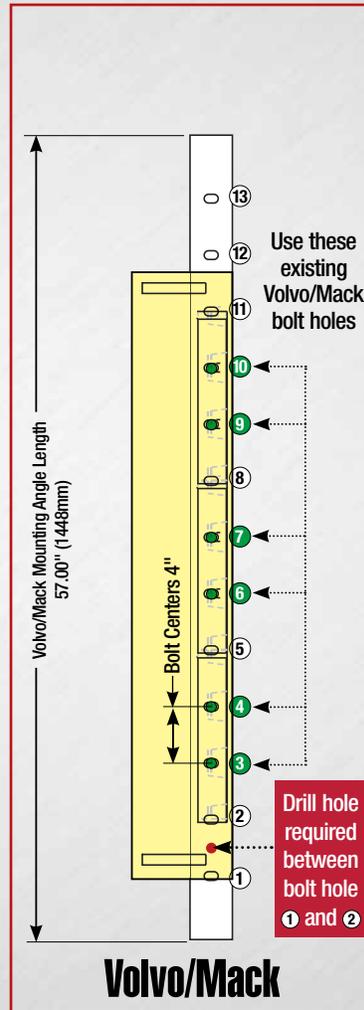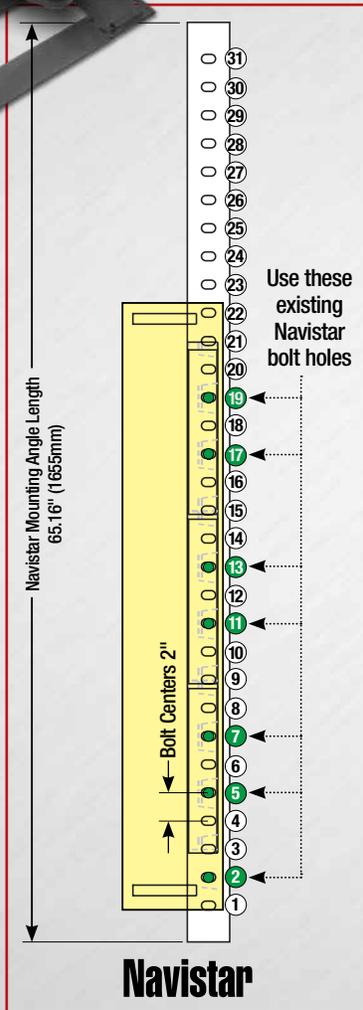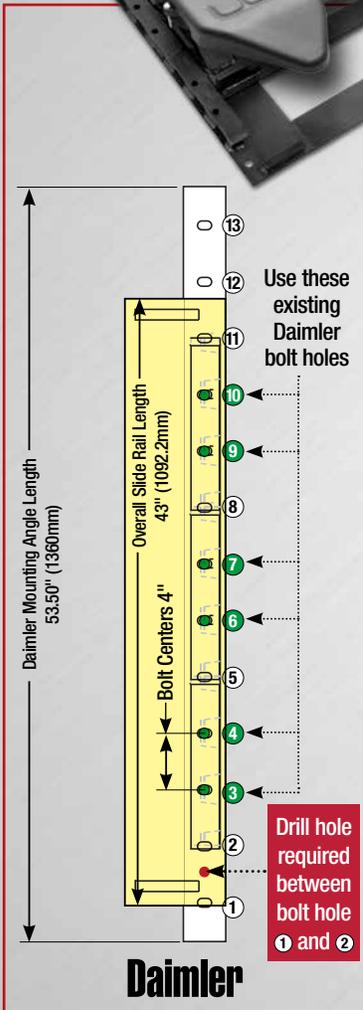

OEM names used for reference purposes only.

For additional instructions please refer to:  
 "LT-181 installation Guide" and  
 "TMC RP 603C Fifth Wheel Mounting-Aftermarket."  
 Documents available at [fifthwheel.com/convert/](http://fifthwheel.com/convert/)



**FONTAINE**<sup>®</sup>  
 FIFTH WHEEL

[www.fifthwheel.com](http://www.fifthwheel.com) • 800-874-9780 • Email: [parts@fifthwheel.com](mailto:parts@fifthwheel.com)

©2017 Fontaine Fifth Wheel • LT-236 • September 2017 R3

